



## Technical Data Sheet

# MSK03


<b>Description:</b>	Stainless steel gauze
<b>Type of weave:</b>	Stainless steel monofilament
<b>Roll width:</b>	120 cm $\pm$ 2 cm
<b>Surface resistivity:</b>	Max average 0,05 Ohm/square
<b>Shielding effectiveness:</b>	40-60 dB from 30 MHz to 4 GHz
<b>Purpose:</b>	conductive fabric for general purpose
<b>Temperature range:</b>	-30 °C to 90 °C

**Product applications:** base material for EMI/RFI, window shielding

Lorix Ltd.

Lorix Ltd.

Netting **MSK03**

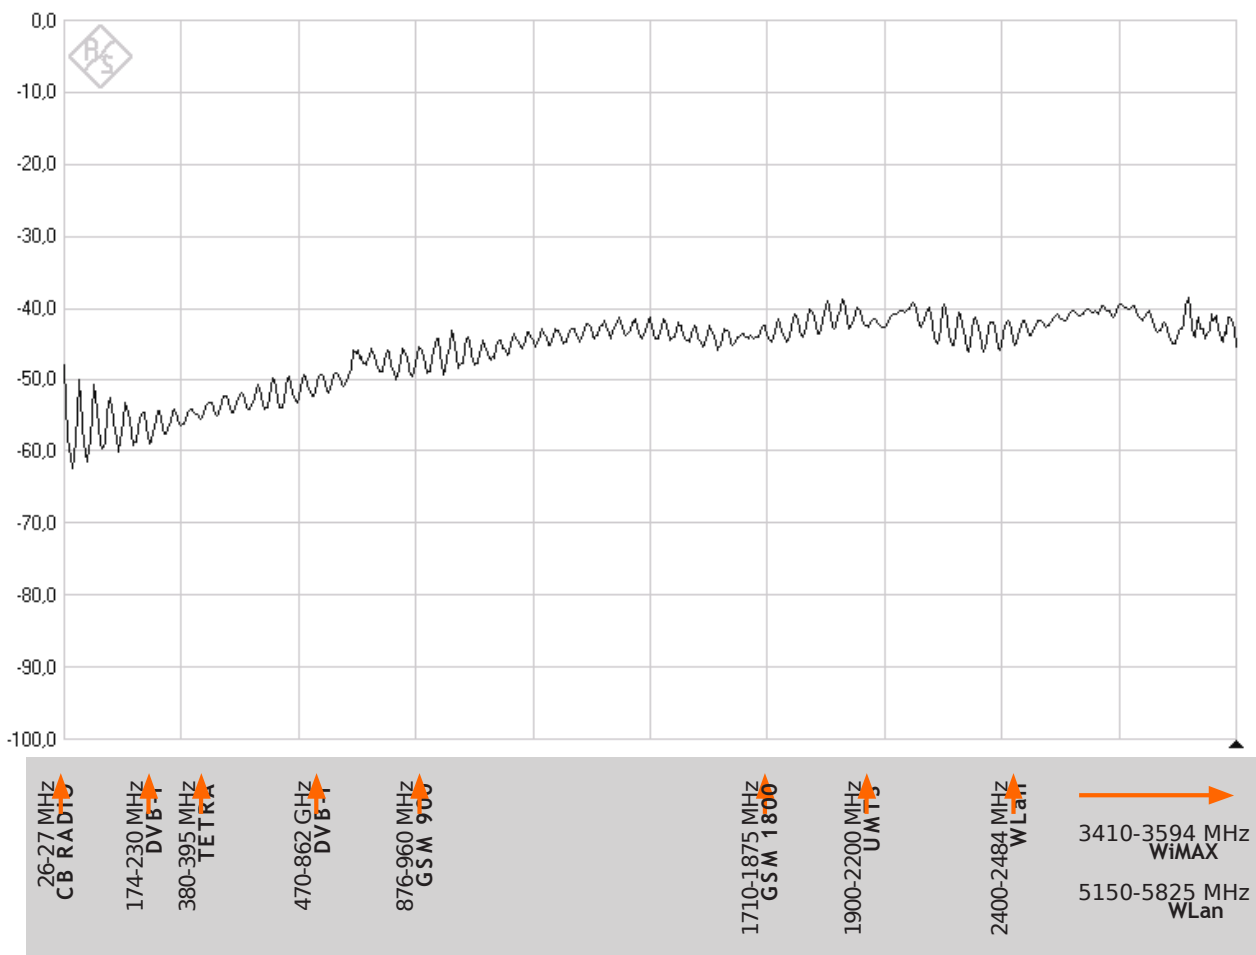

Protected by LORIX Ltd.

H-1112 Budapest  
Oltvány árok 14.  
Hungary  
Tel.: (+36) 1 246 6921  
Fax.: (+36) 1 246 0475



[lorix@lorix.hu](mailto:lorix@lorix.hu) [www.lorix.hu](http://www.lorix.hu)