




Technical Data Sheet

PBN 1.3CuIv4

Description:	copper + acrylic coated non-woven fabric
Type of raw material:	polyamide non-woven PBN 1.3
Roll width:	102 cm \pm 2 cm
Surface resistivity:	max average 0,02 Ohm/square
Shielding effectiveness:	70-80 dB from 100 MHz to 1 GHz
Purpose:	conductive fabric for general purpose
Temperature range:	-30 °C to 90 °C

Product applications: medical, biological applications, base material for EMI/RFI

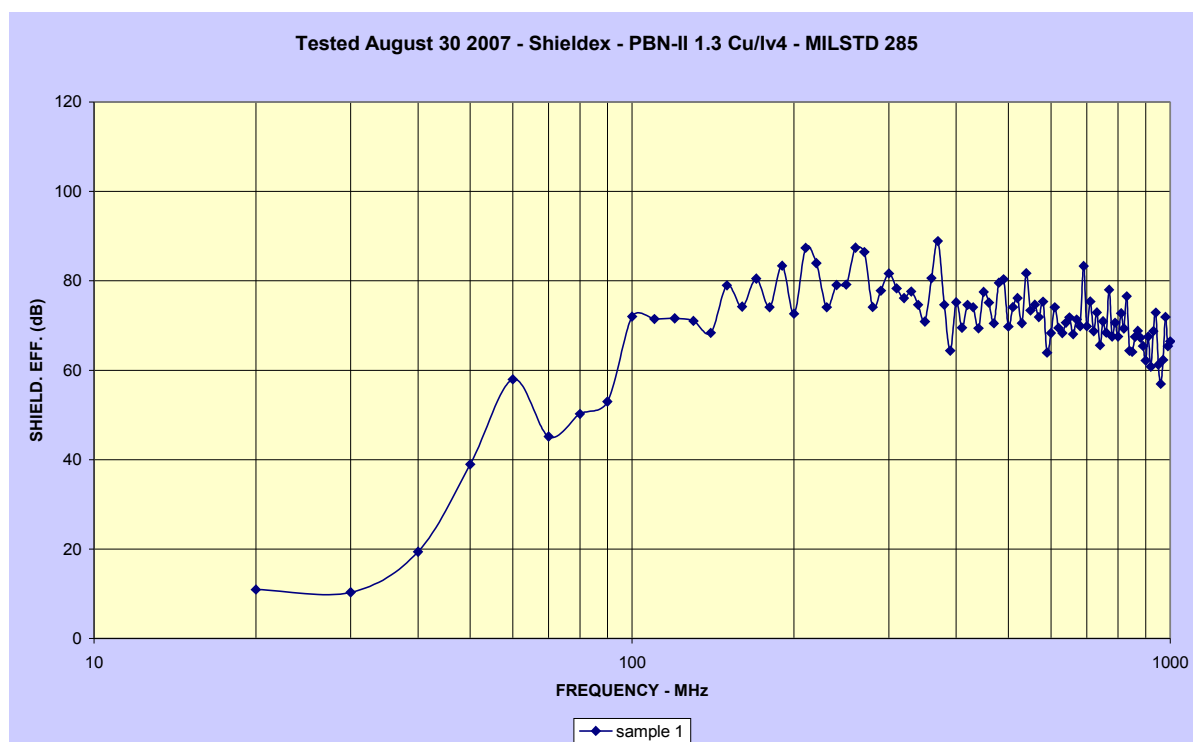

Protected by LORIX Ltd.

H-1112 Budapest
Oltvány árok 14.
Hungary
Tel.: (+36) 1 246 6921
Fax.: (+36) 1 246 0475



lorix@lorix.hu www.lorix.hu