




## Technical Data Sheet

## PWAgCuNi

Description:	silver + copper + nickel plated woven fabric
Type of weave:	Plain weave polyamide silk
Roll width:	130 cm $\pm$ 2 cm
Surface resistivity:	max average 0,02 Ohm/square
Shielding effectiveness:	80-90 dB from 100 MHz to 1 GHz
Purpose:	conductive fabric for general purpose
Temperature range:	-30 °C to 90 °C

Product applications: base material for EMI/RFI gaskets, garments

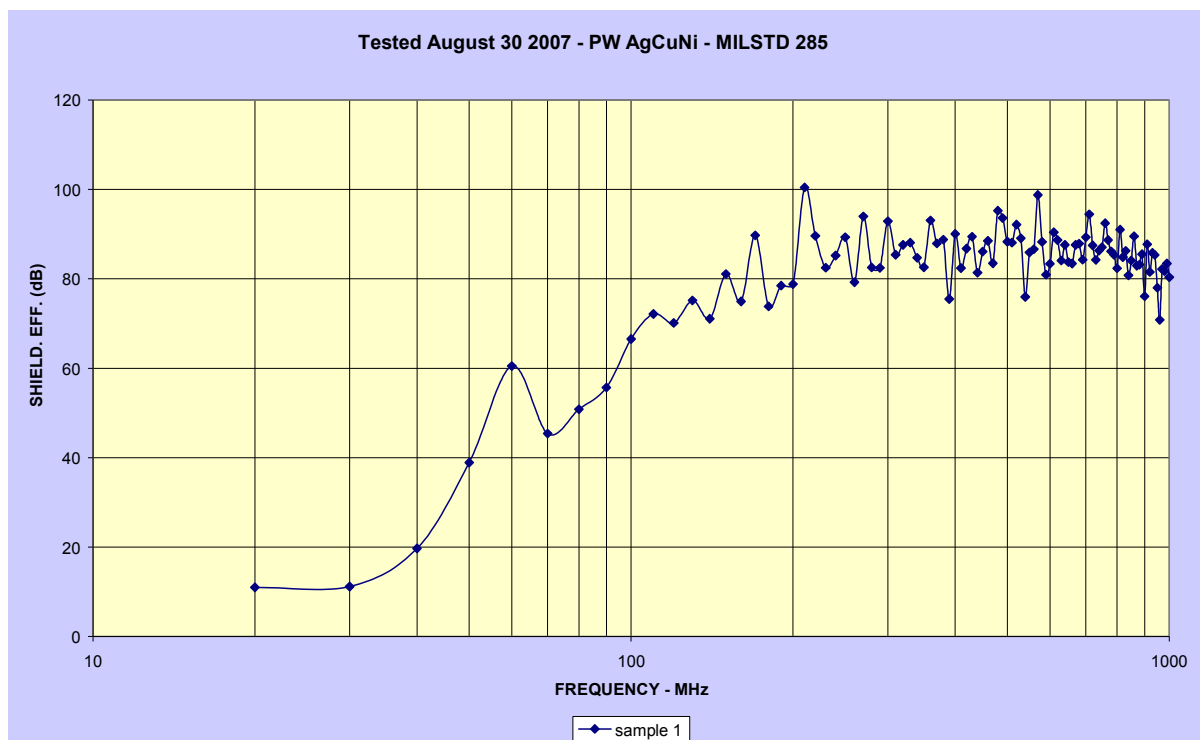

Protected by LORIX Ltd.

H-1112 Budapest  
Oltvány árok 14.  
Hungary  
Tel.: (+36) 1 246 6921  
Fax.: (+36) 1 246 0475



[lorix@lorix.hu](mailto:lorix@lorix.hu) [www.lorix.hu](http://www.lorix.hu)