


# Technical Data Sheet

## PWKCuv4

Description: copper + acrylic coated woven fabric  
Type of weave: Plain weave polyester fabric  
Roll width: 132 cm ±2 cm  
Surface resistivity: Max average 0,05 Ohm/square  
Shielding effectiveness: 60-75 dB from 30 MHz to 1.5 GHz  
70-80 dB from 1.5 GHz to 3.0 GHz  
Temperature range: -30 °C to 90 °C

Product applications: medical, biological applications,  
conductive fabric for general purpose  
base material for EMI/RFI

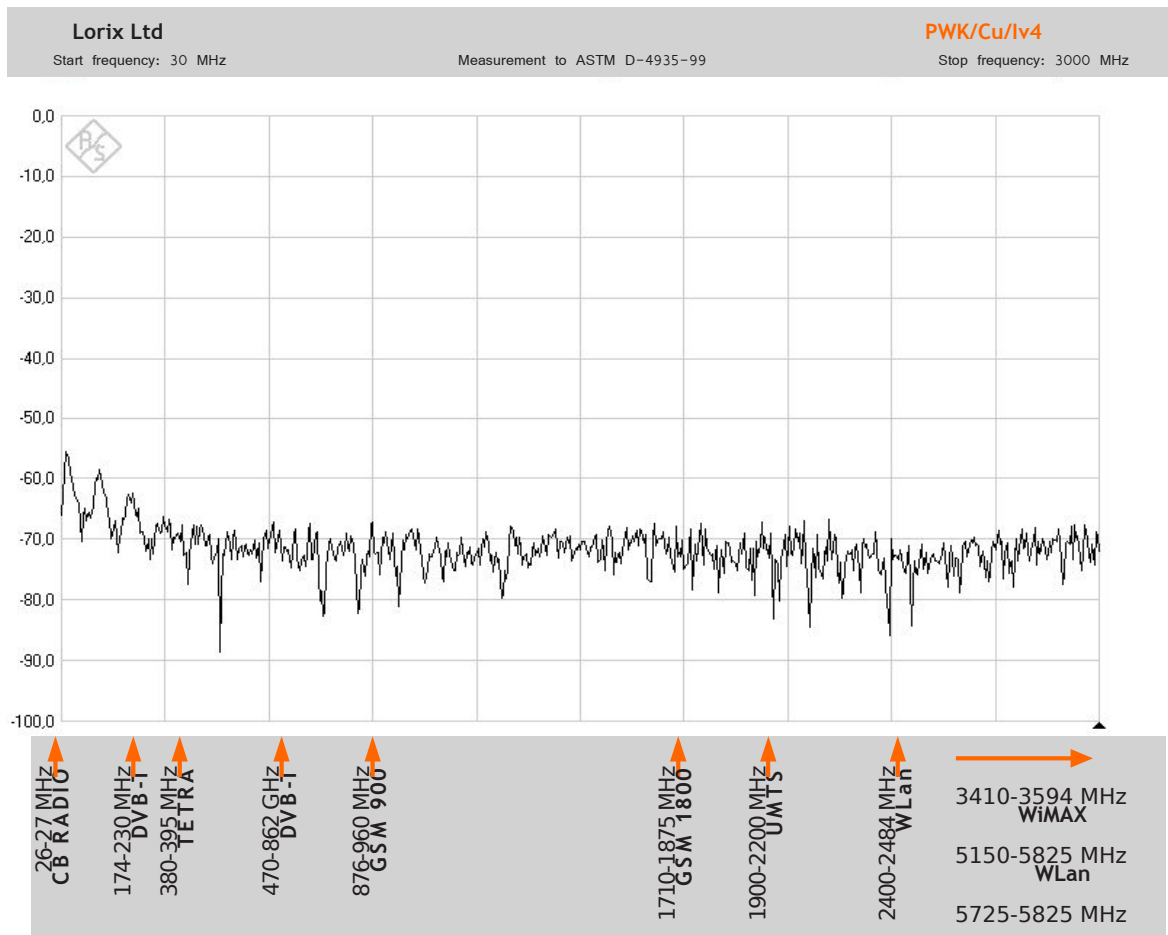

Protected by LORIX Ltd. H-1112 Budapest Oltvány árok 14.  
Hungary  
Tel.: (+36) 1 246 6921  
Fax.: (+36) 1 246 0475



[lorix@lorix.hu](mailto:lorix@lorix.hu) [www.lorix.hu](http://www.lorix.hu)