


Technical Data Sheet

PWKCuNi

Description:	copper + nickel plated woven fabric
Type of weave:	Plain weave polyester fabric
Roll width:	132 cm ±2 cm
Surface resistivity:	Max average 0,05 Ohm/square
Shielding effectiveness:	60-75 dB from 30 MHz to 1.5 GHz 70-80 dB from 1.5 GHz to 3.0 GHz
Temperature range:	-30 °C to 90 °C
Product applications:	conductive fabric for general purpose base material for EMI/RFI gaskets, garments

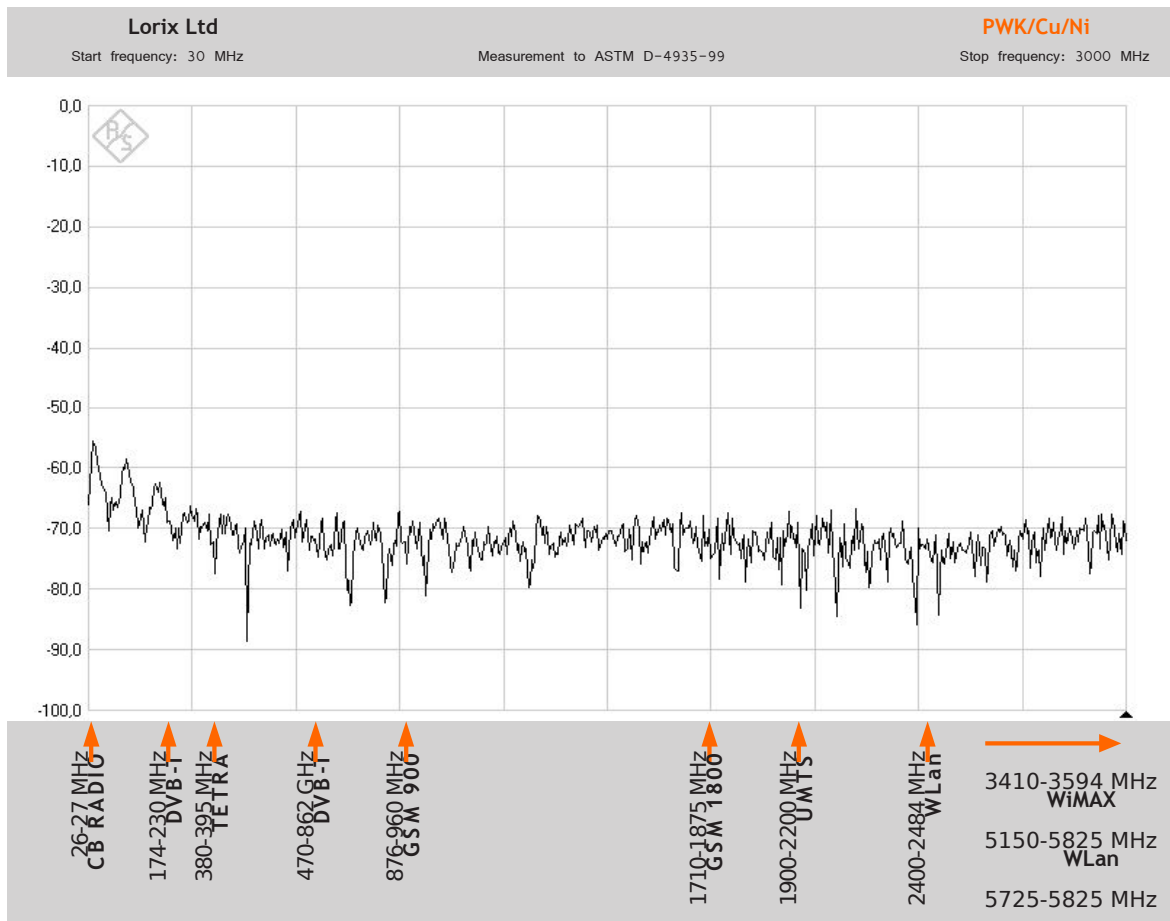

Protected by LORIX Ltd. H-1112 Budapest Oltvány árok 14.
Hungary
Tel.: (+36) 1 246 6921
Fax.: (+36) 1 246 0475



lorix@lorix.hu www.lorix.hu