




Technical Data Sheet

RSAgCuSn

Description:	copper + silver + tin plated woven fabric
Type of weave:	FSS ripstop polyamide parachute silk
Roll width:	130 cm \pm 2 cm
Surface resistivity:	max average 0,02 Ohm/square
Shielding effectiveness:	80-90 dB from 100 MHz to 1 GHz
Purpose:	conductive fabric for general purpose
Temperature range:	-30 °C to 90 °C

Product applications: base material for EMI/RFI gaskets, garments

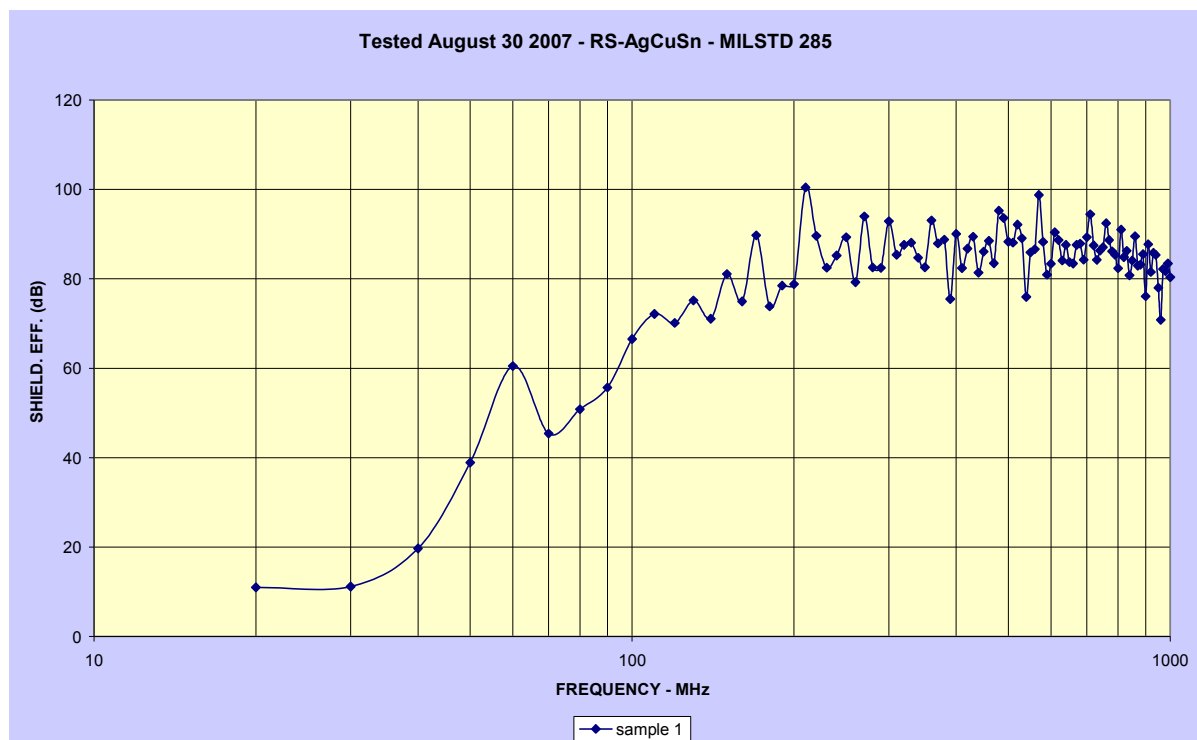

Protected by LORIX Ltd.

H-1112 Budapest
Oltvány árok 14.
Hungary
Tel.: (+36) 1 246 6921
Fax.: (+36) 1 246 0475



lorix@lorix.hu www.lorix.hu